2.B.2 - Nitric Acid Production 1/3

2.B.2 - Nitric Acid Production

Short description

Category Code	Method			AD				EF							
2.B.2	T2				PS				D						
Key Category	SO ₂	NOx	ΝНз	NMVOC	CO	ВС	Pb	Hg	Cd	Diox	PAH	НСВ	TSP	PM ₁₀	PM2.5
2.B.2	-	L/-	-	-	-	-	-	-	-	-	-	-	-	-	-

T = key source by Trend L = key source by Level

Methods			
D	Default		
RA	Reference Approach		
T1	Tier 1 / Simple Methodology *		
T2	Tier 2*		
Т3	Tier 3 / Detailed Methodology *		
С	CORINAIR		
CS	Country Specific		
M	Model		

^{*} as described in the EMEP/CORINAIR Emission Inventory Guidebook - 2007, in the group specific chapters.

	•	
AD	- Data Source for Activi	ty Data
NS	National Statistics	
RS	Regional Statistics	
IS	International Statistics	
PS	Plant Specific data	
AS	Associations, business org	anisations
Q	specific questionnaires, su	rveys
FF	Fusionian Factors	


EF	- Emission Factors
D	Default (EMEP Guidebook)
C	Confidential
CS	Country Specific
PS	Plant Specific data

During the production of nitric acid (HNO_3), nitrogen oxide is produced unintentionally in a secondary reaction during the catalytic oxidation of ammonia (NH_3). HNO_3 production occurs in two process stages:

- Oxidation of NH₃ to NO and
- Conversion of NO to NO₂ and absorption in H₂O.

Details of the process are outlined below:

2.B.2 - Nitric Acid Production 2/3

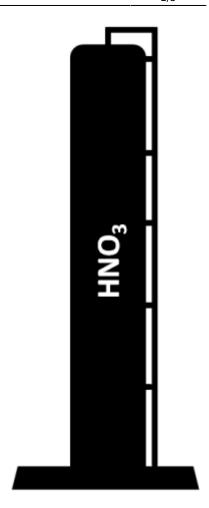

Catalytic oxidation of ammonia

A mixture of ammonia and air at a ratio of 1:9 is oxidised, in the presence of a platinum catalyst alloyed with rhodium and/or palladium, at a temperature of between 800 and 950 °C. The reaction according to the Oswald process is as follows:

$$4 \text{ NH}_3 + 5 \text{ O}_2 -> 4 \text{ NO} + 6 \text{ H}_2\text{O}$$

Simultaneously, nitrogen, nitrous oxide and water are formed by the following undesired secondary reactions:

$$4 \text{ NH}_3 + 3 \text{ O}_2 -> 2 \text{ N}_2 + 6 \text{ H}_2\text{O}$$

$$4 NH_3 + 4 O_2 -> 2 N_2O + 6 H_2O$$

All three oxidation reactions are exothermic. Heat may be recovered to produce steam for the process and for export to other plants and/or to preheat the residual gas. The reaction water is condensed in a cooling condenser, during the cooling of the reaction gases, and is then conveyed into the absorption column.

Method

In Germany, there are currently seven nitric acid plants.

2.B.2 - Nitric Acid Production 3/3

Activity data

As this source category is a key category for N_2O , plant specific activity data is collected here according to the IPCC guidelines.

This data is made available basically via a co-operation agreement with the nitric acid producers and the IVA (Industrieverband Agrar). As the data provided by the producers has to be treated as confidential, it is anonymised by the IVA before submitting it to the UBA. However, one producer is delivering its data directly to the UBA. After checking this specific data, it is merged with that provided by the IVA.

According to the IVA, catalytic reduction is used as an abatement method in some of the plants.

Emission factors

For NO_x the default emission factor from the EEA Emission Inventory Guidebook of 10 kg/t NH_3^{11} is used.

Recalculations

With **activity data** and **emission factors** remaining unrevised, no recalculations have been carried out compared to last year's submission.



For pollutant-specific information on recalculated emission estimates for Base Year and 2018, please see the pollutant specific recalculation tables following chapter 8.1 - Recalculations.

Planned improvements

Germany is in contact with the IVA with the aim to get a Country-specific EF for the NOx emissions. It is expected that the Country-specific EF will be lower than the Default EF.

¹⁾ EEA, 2013: EMEP EEA Emission Inventory Guidebook 2013, Aug 2013: page 15, table 3.3 Tier 1 emission factor for source category 2.B.2 Nitric acid production